

Add-On Accessories

iDock™ | TA-8300

iDock™ plays music, movies, or other iDevice multimedia through the flat panel TV or sound system. TeleAdapt's Made for iPod/iPhone/iPad licensed cable provides a simple "one size fits all" docking station for any model iDevice. Installation kit includes Auto-Sensing Module for automatic TV-switching feature with hospitality's most popular TV/VOD brands as well as a USB-to-AC power adapter for convenient device charging.

Installation Instructions

- 1 | Install MediaHub SL⁺ as usual, based on your TV/STV-Supported Installation instructions.
- 2 | Plug the iPod-to-composite cable and iPod/CAT5 Adapter into the "IPOD" port on the ASM.
- 3 | Connect the ASM's USB Pwr cable to the AC Adapter brick and plug into 120V wall outlet.
- 4 | Assemble the cable, base and cap with the 30pin connector facing the larger channel opening.
- 5 | Under the base, secure cap with small locking screw.

Special Notes:


Refer to the TV/STB Supported Installation Instructions for the control/AV connections specific to your TV/VOD environment.

Serial/RJP/Game/Data ports do not draw enough power to charge High Current iDevices such as iPads. Therefore in order to provide High Current Power, you must connect the ASM's USB Pwr In connection to a wall outlet, using the AC Adapter provided.

AC Adapter is equipped with two USB inputs to combine the MediaHub SL power and ASM power to one outlet.

Be sure the ASM DIP Switches are set to the appropriate positions:

TV/VOD	SW 1	SW 2	SW 3	SW 4
LODGENET	OFF	OFF	OFF	OFF
TELEADAPT	ON	OFF	OFF	OFF
SAMSUNG (OPTIONAL)	OFF	ON	OFF	OFF
LG/RJP	ON	ON	OFF	OFF
PHILIPS	OFF	OFF	ON	OFF
ENSEO	ON	OFF	ON	OFF
PANASONIC	OFF	ON	ON	OFF
SONY	ON	ON	ON	OFF
SHARP	OFF	OFF	OFF	ON
HISENSE	ON	OFF	OFF	ON

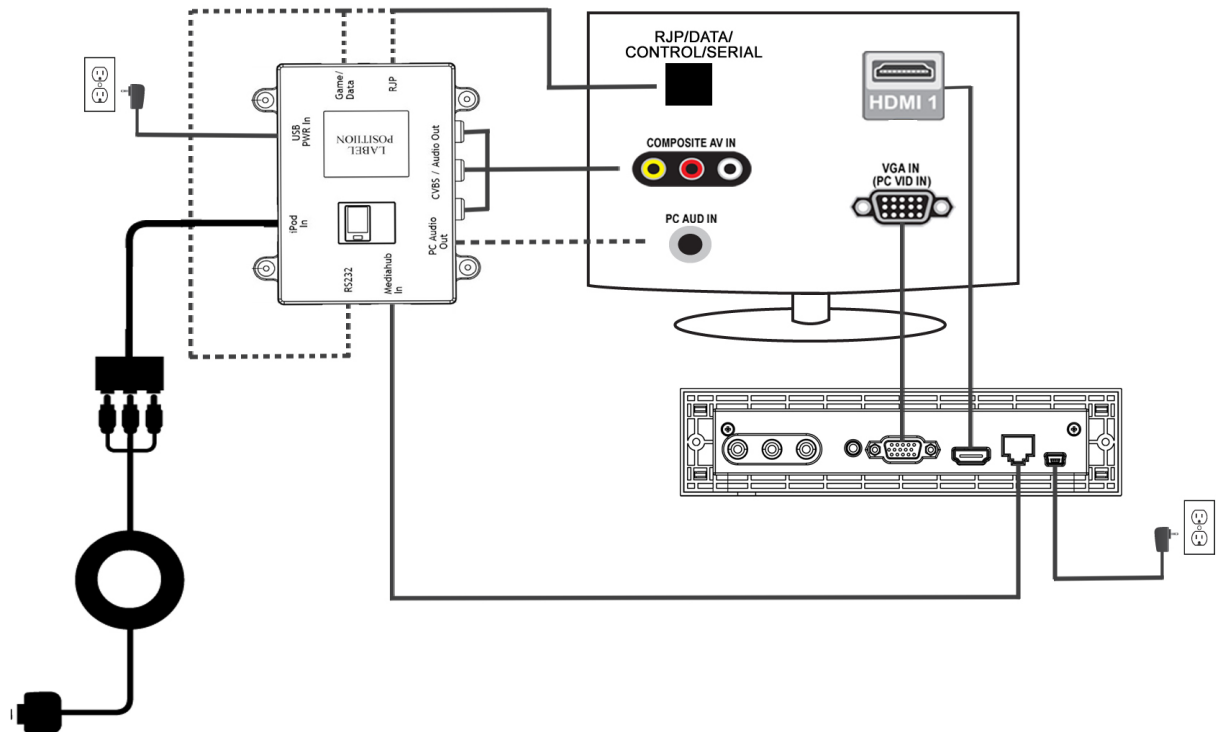

iDockTroubleshooting

If iDock is unresponsive or MediaHub SL does not auto-sense the iPod device, try the following troubleshooting procedures:

- 1** Fully remove AC power to the TV. Power cycle the ASM and MediaHub. Then re-apply power to the TV and use the remote control to turn the TV on. Wait 30 seconds before activating any input source into the MediaHub.
- 2** Ensure the adapter's iPod/CAT5 adapter is securely connected to the ASM "IPOD" port.

If problem persists, please contact one of our regional technical support teams:

For North and South American 24/7 Technical Support

Toll-Free: 1 877 835 3232 x319 (in US and Canada)

Main: 1 775 232 5044

Email: ric.jones@us.teleadapt.com